

01-27-00

01/26/00

**UTILITY PATENT APPLICATION TRANSMITTAL  
(Large Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
13178 (JA998-139)Total Pages in this Submission  
3**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**PROGRAM DISPLAY AND SELECTING APPARATUS, DIGITAL BROADCAST RECEIVER AND DIGITAL BROADCAST RECEIVING SYSTEM**

and invented by:

Yoshifumi Sakamoto, Hiroaki Kubo, Norio Fujita

JC564 U.S. PTO  
09/491467  
01/26/00If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 19 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☐ Cross References to Related Applications (if applicable)
  - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
  - d. ☐ Reference to Microfiche Appendix (if applicable)
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings (if drawings filed)
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.  
13178 (JA998-139)

Total Pages in this Submission  
3

**Application Elements (Continued)**

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☒ Formal                      Number of Sheets                      11
- b. ☐ Informal                      Number of Sheets                      \_\_\_\_\_
4. ☒ Oath or Declaration
- a. ☒ Newly executed *(original or copy)*                      ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☒ With Power of Attorney                      ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied  
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

**Accompanying Application Parts**

8. ☒ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement/PTO-1449                      ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class                      ☒ Express Mail *(Specify Label No.):* EL089369531US

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
13178 (JA998-139)

Total Pages in this Submission  
3

## Accompanying Application Parts (Continued)

15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)

16. ☐ Additional Enclosures (please identify below):

## Fee Calculation and Transmittal

### CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	16	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	2	- 3 =	0	x \$78.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose) <u>Recordation of Assignment</u>					\$40.00
TOTAL FILING FEE					\$730.00

- ☐ A check in the amount of \_\_\_\_\_ to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 50-0510/IBM as described below. A duplicate copy of this sheet is enclosed.
- ☒ Charge the amount of \$730.00 as filing fee.
  - ☒ Credit any overpayment.
  - ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
  - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

  
Signature

Richard L. Catania  
Registration No. 32,608

Dated: January 26, 2000

SCULLY, SCOTT, MURPHY & PRESSER  
400 Garden City Plaza  
Garden City, New York 11530  
(516) 742-4343

cc:

**CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)**Applicant(s): **Yoshifumi Sakamoto, et al.**

Docket No.

**13178 (YO998-139)**

Serial No.

**Unassigned**

Filing Date

**Herewith**

Examiner

**Unassigned**

Group Art Unit

**Unassigned**

Invention: **PROGRAM DISPLAY AND SELECTING APPARATUS, DIGITAL BROADCAST RECEIVER AND DIGITAL BROADCAST RECEIVING SYSTEM**

I hereby certify that this **New Patent Application***(Identify type of correspondence)*

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under

37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231

on **January 26, 2000***(Date)***Mishelle Spina***(Typed or Printed Name of Person Mailing Correspondence)**(Signature of Person Mailing Correspondence)***EL089369531US***("Express Mail" Mailing Label Number)***Note: Each paper must have its own certificate of mailing.**

PROGRAM DISPLAY AND SELECTING APPARATUS,  
DIGITAL BROADCAST RECEIVER AND  
DIGITAL BROADCAST RECEIVING SYSTEM

5

BACKGROUND OF THE INVENTION

Technical Field

10

The present invention relates to a program display and selecting apparatus for displaying an electronic program guide (EPG) contained in a digital broadcast and for selecting a program to be monitored, a digital broadcast receiver for transmitting an EPG to the program display and selecting apparatus, and a digital broadcast receiving system comprising the program and selecting apparatus and the digital broadcast receiver.

15

Prior Art

20

In analog broadcasting, only one channel can be allotted to one frequency band, whereas a plurality of channels can be allotted to one frequency band in digital broadcasting. Therefore, digital broadcasting can realize a multi-channel system more easily than analogue broadcasting. Digital broadcasting now includes communications satellite (CS) broadcasting, cable broadcasting, Internet broadcasting, and the like. All the receivers for these broadcastings are of set-top box type, as shown in Fig. 6. The set-top box 90, which is an apparatus connected to a television monitor 70, has a function of receiving and conversing image signal and a

25

30

connecting interface for connecting with a telephone circuit or a personal computer.

5 The digital broadcast receiver 90 shown in Fig. 6 includes a digital input (receiving cable 96), a television output (output cable 74) and a remote control interface (I/F) (receiving unit 108). A program selected by a user from among the broadcast programs input through the output cable 74 is outputted on the monitor screen 72 of the television 70 through the output cable 74. A program is selected through the use of infrared remote control apparatus 92 having a transmission unit 118, or by operating buttons on the main body of the receiver 90.

15 In digital broadcasting represented by CS broadcasting, cable broadcasting and the like, such data as image, sound and computer program is compressed in accordance with Moving Picture Expert Group Phase 2 (MPEG2), and the mixed data is transmitted in accordance with MPEG2-TS (transport stream). The MPEG2-TS contains the electronic program guide called EPG, in addition to the program.

25 As shown in Fig. 7, the digital broadcast receiver 90 includes:

30 a tuner unit 64 for receiving data;  
an MPEG2 transport demultiplexer 62 for transmitting the program data from the tuner 64 to an MPEG2 decoder and image processor 102 and for transmitting EPG information (program table) to a microprocessor unit (MPU) 104;

an MPEG2 decoder and image processor 102 for obtaining the program image and sound data from the received MPEG2 data as well as for synthesizing the EPG information processed by the MPU 104 with the program data; and

an NTSC (National Television System Committee) encoder and audio 68 for outputting the program data and the EPG information to the television 70.

The program data is received by the tuner unit 64 and then transmitted as a digital data to the MPEG2 transport demultiplexer 62. The program image and sound data are transmitted from the transport demultiplexer 62 to the NTSC encoder and audio 68 through the MPEG2 decoder and image processor 102 and then outputted to the television 70 as an analog image and sound output.

The EPG information is, as shown in Fig. 8, transmitted from the transport demultiplexer 62 to the MPU 104 (arrow A in Fig. 8). After being processed by the MPU 104, it is transmitted to the MPEG2 decoder and image processor 102 (arrow B in Fig. 8). After being subjected to image processing, it is displayed on the television monitor screen 72.

The digital broadcast receiver 90 including an infrared interface 106 and the infrared receiving unit 108, which are connected to the MPU 104, can receive a signal from the remote control apparatus 92 and input the signal to the MPU 104. A program channel displayed on the television 70 is selected by controlling the demultiplexer 62 by the MPU 104. Also, the program table

is switched on or off by controlling the MPEG2 decoder and image processor 102 by the MPU 104.

As shown in Fig. 7, the remote control apparatus 92 includes a switch button 112, a switch button interface 114, an infrared transmitting unit 118 and an infrared interface 116 for transmitting the input switch button information to the receiver unit 90. When the switch button is pressed, the input information is transmitted to the MPU 104 of the receiver 90.

For example, when a remote control apparatus 92 is equipped with switch buttons corresponding to the channel numbers and one of the buttons is pressed, the information of the pressed button is transmitted to the MPU 104. The MPU 104 controls the transport demultiplexer 62 (arrow A in Fig. 9) and switches the program to be received by the tuner 64 to a channel corresponding to the pressed button.

For further example, when the switch button for switching the program table display on/off on the remote control apparatus 92 is pressed in the non-display status of the program table, the information that a button has been pressed is transmitted to the MPU 104. The MPU 104 transmits an EPG information (arrow B in Fig. 9) to the MPEG2 decoder and image processor 102 and displays the program table after image processing the information.

The EPG (program table) includes information concerning a broadcasting program such as channel number, channel name, program name, date of a program, start time of a



program, program code, program description and so on.  
For example, as shown in Fig. 11 to Fig. 13, such  
information as messages and program tables are provided  
to the users by displaying the information of each  
5 program in the program frames 82 and 84 and by displaying  
a description for the selected program 84 in the  
description frame 86. Referring to the EPG information  
78 displayed on the monitor screen 72, the users are able  
to select a program to monitor with the remote control  
10 apparatus 92.

A monitor screen for EPG display is used to display an  
EPG information 78, or the EPG information 78 may often  
be superposed on a program image 76. However, in these  
15 cases, almost all the area of the monitor screen 72 is  
occupied by the EPG information 78. To describe patterns  
for EPG display more precisely, for example, Fig. 10  
shows a program image 76 before displaying an EPG  
information. In Fig. 11, the EPG information 78 is  
20 displayed on a full screen. In 12, the EPG information  
78 is superposed on the program image 76, and in Fig. 13,  
the program image 76 is displayed on the compressed  
monitor frame 88.

In the case of displaying the EPG information 78 on a  
full screen 72 of the television 70 as shown in Fig. 11,  
only the EPG information 78 is displayed on the screen,  
so that the program image 76 in the receiving cannot be  
monitored. Unlike the above case in Fig. 11, in the case  
25 of displaying the EPG by superposing the EPG 78 on the  
program image 76 as shown in Fig. 12, only a small part  
of the program image 76 in the receiving can be monitored  
30

from between the gaps of the program table 78. However, the program image 76 can hardly be monitored sufficiently. In some cases, the EPG information may be superposed on the program image 76 as a translucent or see-through image through which the program image 76 can be seen. However, again, although it is possible to monitor the program image 76 between the gaps and through the translucent EPG image, it is hard to monitor the program. Also, since the program image 76 is visible through the program table 78, it is hard to read the characters on the program table 78.

In the case of Fig. 13, the image 76 being received is compressed and displayed in a part of the monitor screen 72 of the television 70 (compressed monitor screen 88) and the EPG information 78 is displayed in the remaining area of the monitor screen. Since the program image 76 is compressed, the image 76 of Fig. 13 is inferior to the normal image shown in Fig. 10. As described above, when the EPG information 78 is displayed on the television monitor screen 72, the users are interrupted in monitoring a program or made it hard to monitor a program.

The digital broadcast receiver receives the EPG information for channels in the same frequency band as that currently being received once every 10 seconds and the EPG information for channels in different bands from the current band once every 30 seconds. Therefore, for example, assuming that there are 200 channels and 4 channels are included in one frequency band and that frequency or channel is changed to capture the EPG for

the 200 channels (4 channels x 50 bands) sequentially,  
one channel for each band, it will take 10 seconds x 50 =  
500 seconds (8 minutes and 20 seconds), 10 seconds per  
band. In order to capture the EPG information for the  
200 channels, one channel for each band, without changing  
the frequency or channel, it will take 30 seconds x 50 =  
1500 seconds (25 minutes) 30 seconds per band.

In the case of an actually-commercialized CS receiver,  
whenever a screen displaying EPG information is scrolled,  
it is necessary to capture new EPG information to display  
again after scrolling. Therefore, if the screen is  
scrolled while EPG information is being obtained one  
after another under the same conditions described above,  
it will take a maximum latency of 10 seconds for one row  
(for one channel). Thus, if EPG information is received  
every time it is displayed on a television screen, it  
takes longer time to display and renew the information  
and it is impossible to provide the newest EPG  
information constantly to users.

#### SUMMARY OF THE INVENTION

An object of the present invention is to provide a  
digital broadcast receiving system having a program  
display and selecting apparatus and a digital broadcast  
receiver, which can display a program table (or EPG)  
without preventing the monitoring of a program image,  
provide a means for directly selecting a program to be  
monitored, and further provide the newest program tables  
constantly to users.

An essential part of the digital broadcast receiver of the present invention is to include a transmitting means for transmitting the EPG data contained in a received digital broadcast data. An essential part of the program display and selecting apparatus of the present invention is to include a receiving means for the EPG data transmitted from said digital broadcast receiver and a displaying means for displaying the received EPG data.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the present invention will now be described by way of example only, with reference to the accompanying drawings in which:

Fig. 1 is a perspective view illustrating an outline of a program display and selecting apparatus, and a digital broadcast receiver according to the present invention.

Fig. 2 is a block diagram showing a structure of the program display and selecting apparatus, and the digital broadcast receiver shown in Fig. 1.

Fig. 3 is an enlarged view of the program display and selecting apparatus shown in Fig. 1.

Fig. 4 is a block diagram illustrating a flow of an EPG information through the program display and selecting apparatus shown in Fig. 1.

Fig. 5 is a block diagram illustrating a flow of a program selecting information through the program display and selecting apparatus shown in Fig. 1.

5 Fig. 6 is a perspective view illustrating an outline of a conventional remote control apparatus and a digital broadcast receiver.

10 Fig. 7 is a block diagram showing a structure of the remote control apparatus and the digital broadcast receiver shown in Fig. 6.

15 Fig. 8 is a block diagram illustrating a flow of EPG information through the remote control apparatus and the digital broadcast receiver shown in Fig. 6.

20 Fig. 9 is a block diagram illustrating a flow of a program selecting information through the remote control apparatus and the digital broadcast receiver shown in Fig. 6.

25 Fig. 10 is a partially enlarged view showing an example of a monitor screen displaying a program image on the television shown in Fig. 6.

Fig. 11 is a partially enlarged view showing an example of a monitor screen displaying a program table on the television shown in Fig. 6.

30 Fig. 12 is a partially enlarged view showing another example of a monitor screen displaying a program table on the television shown in Fig. 6.



and NISC encoder and audio 68, and it is connected to a receiving cable 96 and an output cable 74.

5 The program display and selecting apparatus 10 comprises a transmitter-receiver unit 14 and an infrared interface 26 which transmit data to and receive data from the digital broadcast receiver 50, an MPU 22, a memory 28 for storing EPG information transmitted from the digital broadcast receiver 50 and an LCD 12 for displaying EPG information. The screen surface of the LCD 12 is a touch panel which allows users to manipulate input operation with a pen or finger. Thus, a program to be monitored can be selected through the touch panel.

10 Fig. 3 is a front view of the program display and selecting apparatus 10. A program table 78, operation marks 44 and 46, a present time line 42 indicating present time and the like are displayed on the LCD screen 12. The program table 78, for example, includes program frames 82 and 84 which indicates content of program on each channel, and a description frame 86 which displays a program description of a selected channel 84. The operation marks 44 and 46 allow the users to scroll up or down the program frames 84 and 82 by touching the mark 44 or 46, for example. In addition, the program display and selecting apparatus 10 can be equipped with operation buttons 32, 34 and 36. For example, these operation buttons can be push button type switches. In this case, the power may be turned on/off by pressing button 32, the sound output level of television image may be reduced by pressing button 34, and sound output level may be increased by pressing button 36.

Next, a functional description of the program display and selecting apparatus when a program is monitored by using the apparatus is given below. Like in the conventional manner, program data is transmitted to the television 70 through the tuner unit 64, the MPEG2 transport demultiplexer 62, the MPEG2 decoder 66 and the NTSC encoder and audio 68.

As shown in Fig. 4, EPG information is transmitted from the transport demultiplexer 62 to the MPU 52. After being processed by the MPU 52, the EPG information is stored temporarily in the memory 54. The EPG information stored in the memory 54 is transmitted from the digital broadcast receiver 50 to the EPG display and selecting apparatus 10 through the infrared I/F 56 and the infrared transmitter-receiver unit 58, after it is further processed or as it is. The EPG information is transmitted whenever the digital broadcast receiver 50 receives a newest EPG information. Further, since the program displayed selecting apparatus 10 is not always ready to receive the EPG information, the digital broadcast receiver 50 repeats the transmission of the EPG information periodically.

In the program displayed selecting apparatus 10, the EPG information is received by the infrared transmitter-receiver unit 14 and the infrared I/F 26. The receiver EPG information is transmitted to and stored in the memory 28 through the MPU 22. Then, the EPG information (program table) stored in the memory 28 is transmitted through the MPU 22 again and displayed on the LCD monitor screen.



When selecting a program to monitor, a user can select a desired program by touching the LCD monitor screen (touch panel) 12 with his/her finger. Information of the selected program is transmitted from the touch panel to the MPU 22 through the touch panel I/F 24 as shown in Fig. 5. Then, the information of the selected program is further transmitted from the infrared I/F 26 and the infrared transmitter-receiver unit 14 to the digital broadcast receiver 50.

In the digital broadcast receiver 50, the information of the selected program received by the infrared transmitter-receiver unit 58 and the infrared I/F 56 is transmitted to the MPU 52. The MPU 52 controls the transport demultiplexer 62 and switches a program received by the tuner 64 to the selected program.

As described above, the program displayed and selecting apparatus 10 comprising a display means eliminates the need for displaying EPG information on the television monitor screen 72, therefore, users are not prevented from monitoring a program. Furthermore, periodical transmutation of EPG information enables users to obtain EPG information constantly. Especially in the conventional manner, whenever EPG information is displayed on the television monitor screen 72, EPG information has to be received, therefore, it takes a considerable period of time to renew the display. However, by using the apparatus 10 of the present invention, the latest EPG information can always be displayed. Furthermore, a user can directly select a program displayed on the television 70 among the EPG

information displayed on the touch panel 12 by touching the panel 12 with his or her finger.

5 Having described the preferred embodiments of the present invention, it should be understood that the program display and selecting apparatus, the digital broadcast receiver and the digital broadcast receiving system according to the present invention can also be materialized in the other embodiments. For example, data  
10 transmission between the program display and selecting apparatus and the digital broadcast receiver can be replaced with a data transmission with an IR-Bus (excepting infrared rays), a radio (radio wave) or the like. Further, the operation means (or touch panel) for  
15 operating the digital broadcast receiver is not limited to selecting a channel, but it can also make a program reservation.

20 Based on the accompanying drawings, practical embodiments of the program display and selecting apparatus, the digital broadcast receiver and the digital broadcast receiving system according to the present invention have been described above, however, the present invention is not limited to the illustrated program display and  
25 selecting apparatus and the digital broadcast receiver. For example, the operating means is not limited to the touch panel. Operation keys or a pointing device such as a joy stick, a mouse or the like can be used as the operating means. Further, the program display and  
30 program selection may also be performed by using a personal computer equipped with an IR (infrared) transmitter-receiver interface. Accordingly, it will be

apparent to those skilled in the art that various changes, improvements, and modifications can be made thereto without departing from the spirit or scope of the invention.

5

According to the program display and selecting apparatus, the digital broadcast receiver and the digital broadcast receiving system of the present invention, using a program display and selecting apparatus which can communicate with a digital broadcast receiver, EPG information can be displayed on the apparatus while a program is monitored. In addition, the newest EPG information (program table) can always be provided to users. Furthermore, a desired program display and selecting apparatus with a pen or a user's finger.

10

15

While the invention has been particularly shown and described with respect to preferred embodiments thereof, it will be understood by those skilled in the art that the foregoing and other changes in form and detail may be made therein without departing from the spirit and scope of the invention.

20

IN THE CLAIMS

Having thus described our invention, what we claim as new, and desire to secure by Letters Patent is:

1        1.    A digital broadcast receiving system comprising:  
2                a digital broadcast receiver having a transmitting  
3 means for transmitting electronic program guide (EPG)  
4 data contained in a received digital broadcast data; and  
5                a program display and selecting apparatus having a  
6 receiving means for receiving the EPG data transmitted  
7 from said digital broadcast receiver.

1        2.    The digital broadcast receiving system according to  
2 claim 1, wherein said program display and selecting  
3 apparatus comprises a displaying means for displaying the  
4 received EPG data.

1        3.    The digital broadcast receiving system according to  
2 claim 1, wherein said digital broadcast receiver  
3 periodically transmits EPG data.

1        4.    The digital broadcast receiving system according to  
2 claim 1, wherein said program display and selecting  
3 apparatus comprises an operation means for operating said  
4 digital broadcast receiver.

1        5.    The digital broadcast receiving system according to  
2 claim 4, wherein said program display and selecting  
3 apparatus comprises a transmitting means for transmitting  
4 operational information inputted into said operation  
5 means to said digital broadcast receiver; and

6           said digital broadcast receiver comprises a  
7 receiving means for receiving the operational information  
8 transmitted from said program display and selecting  
9 apparatus.

1       6. The digital broadcast receiving system according to  
2 claim 4, wherein said operation means comprises a touch  
3 panel.

1       7. The digital broadcast receiving system according to  
2 claim 4, wherein said operation means selects a program  
3 to be monitored.

1       8. A digital broadcast receiver comprising a  
2 transmitting means for transmitting EPG data contained in  
3 a received digital broadcast data.

1       9. The digital broadcast receiver according to claim 8,  
2 wherein said EPG data is transmitted periodically.

1       10. The program display and selecting apparatus  
2 comprising a receiving means from receiving EPG data  
3 transmitted from the digital broadcast receiver as  
4 claimed in claim 8.

1       11. The program display and selecting apparatus  
2 according to claim 10, comprising a display means for  
3 displaying said received EPG data.

1       12. The program display and selecting apparatus  
2 according to claim 10, comprising an operation means for  
3 operating said digital broadcast receiver.

PROGRAM DISPLAY AND SELECTING APPARATUS,  
DIGITAL BROADCAST RECEIVER AND DIGITAL  
BROADCAST RECEIVING SYSTEM

5

ABSTRACT OF THE DISCLOSURE

10

An object of the present invention is to provide a digital broadcast receiving system having a program display and selecting apparatus and a digital broadcast receiver, which can display a program table (or EPG) without preventing the monitoring of a program image, provide a means for directly selecting a program to be monitored, and further provide the newest program tables constantly to users.

15

20

25

A broadcast receiving system consists of a digital broadcast receiver 50 having a transmitter-receiver unit 58 for transmitting EPG data to a program display and selecting apparatus 10 and for receiving signals from the selecting apparatus 10, a displaying means (LCD) 12 for displaying the EPG data transmitted from the receiver 50, an operating means (touch panel) 12 for operating the receiver 50, and a transmitter-receiver unit 14 for receiving the EPG data transmitted from the receiver 50 and for transmitting an operating information input through the touch panel 12 to the receiver 50.

FIG. 1

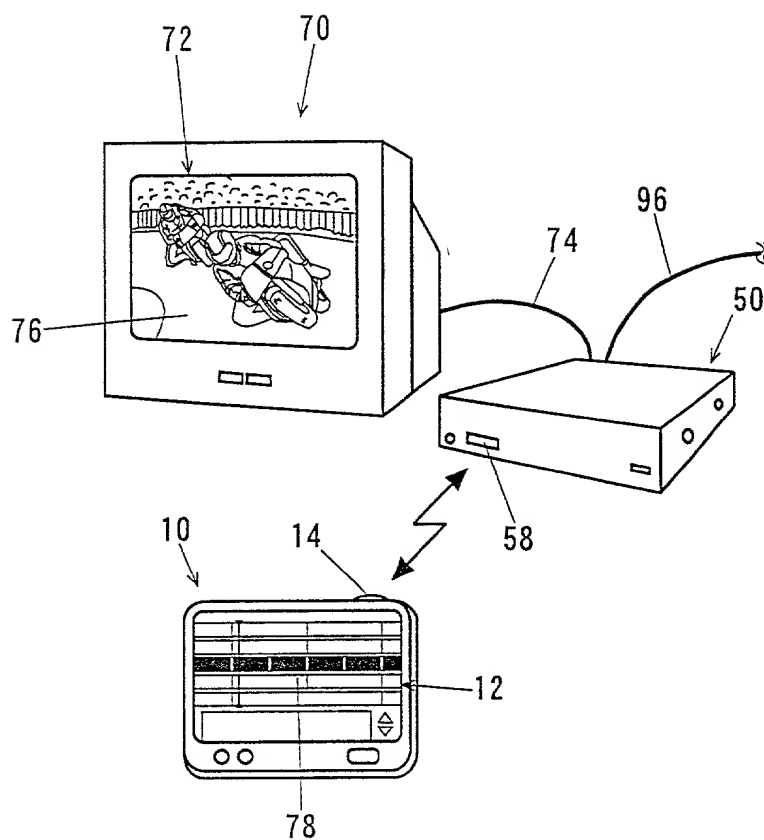


FIG. 2

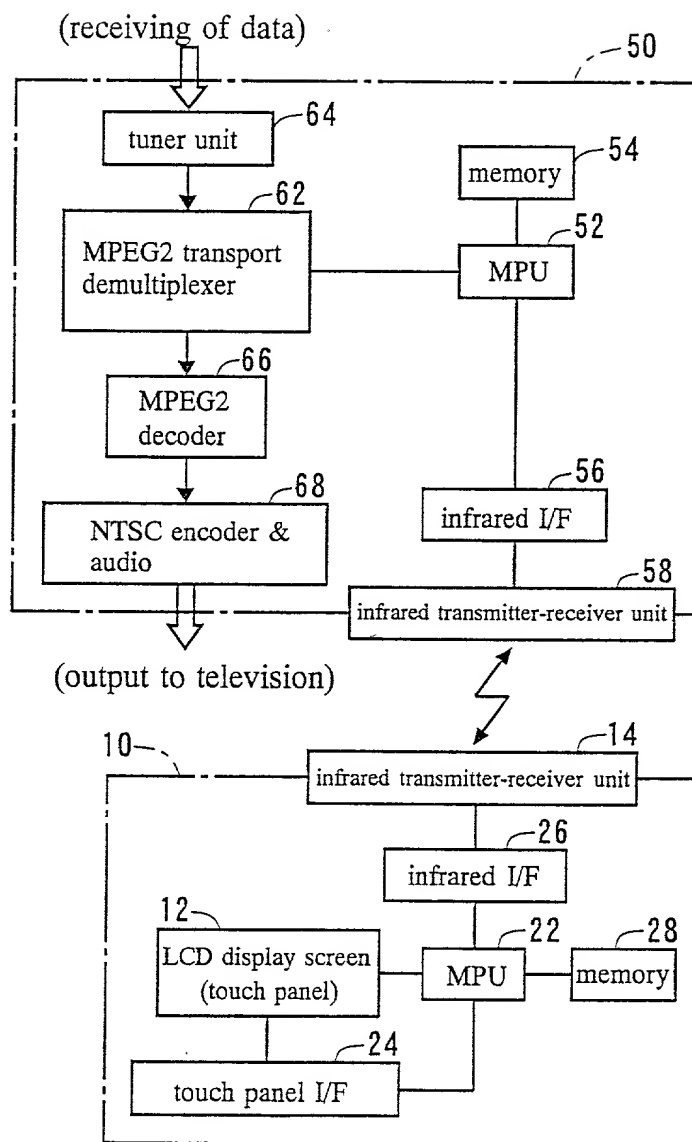




FIG. 3

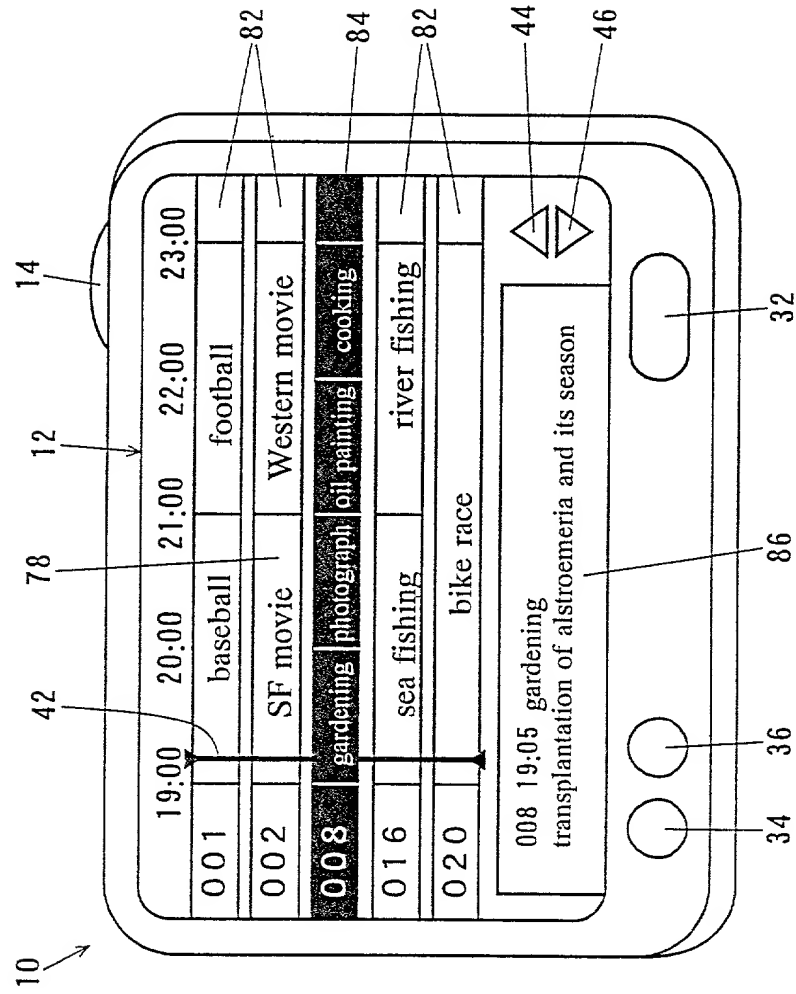


FIG. 4

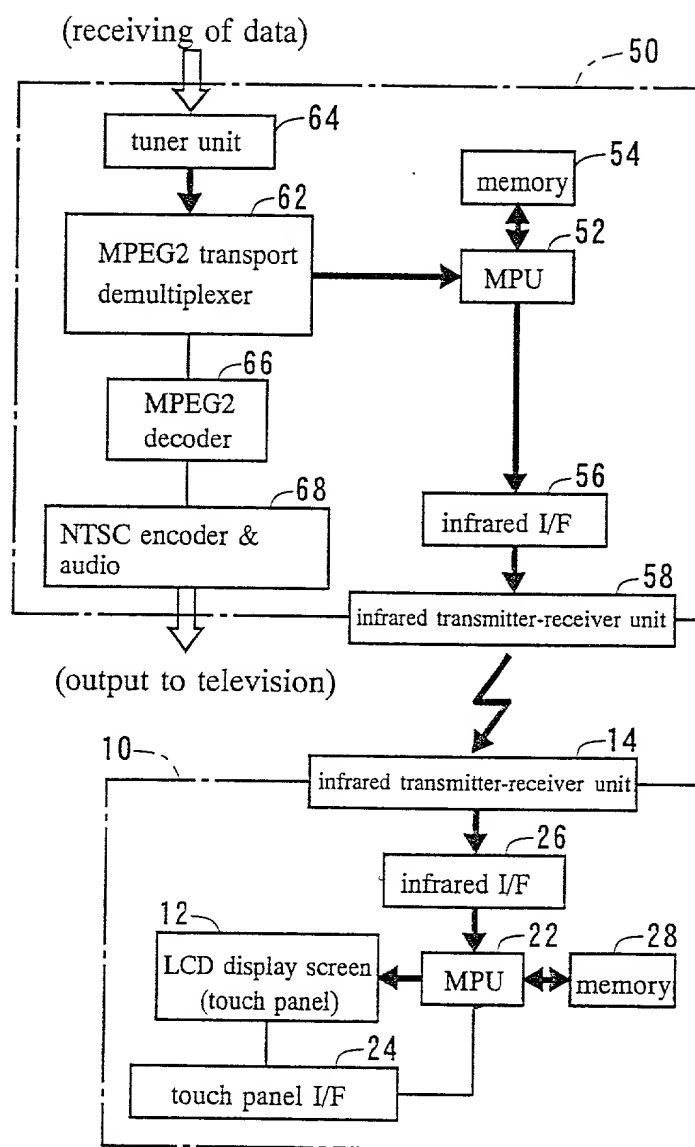


FIG. 5

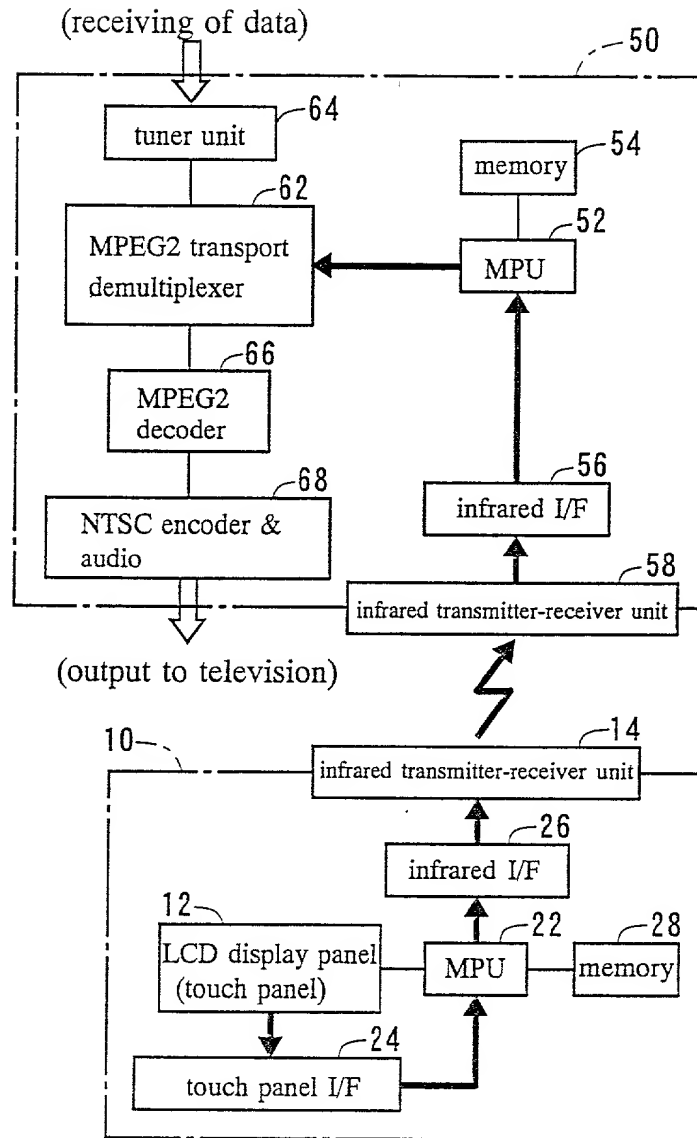


FIG. 6

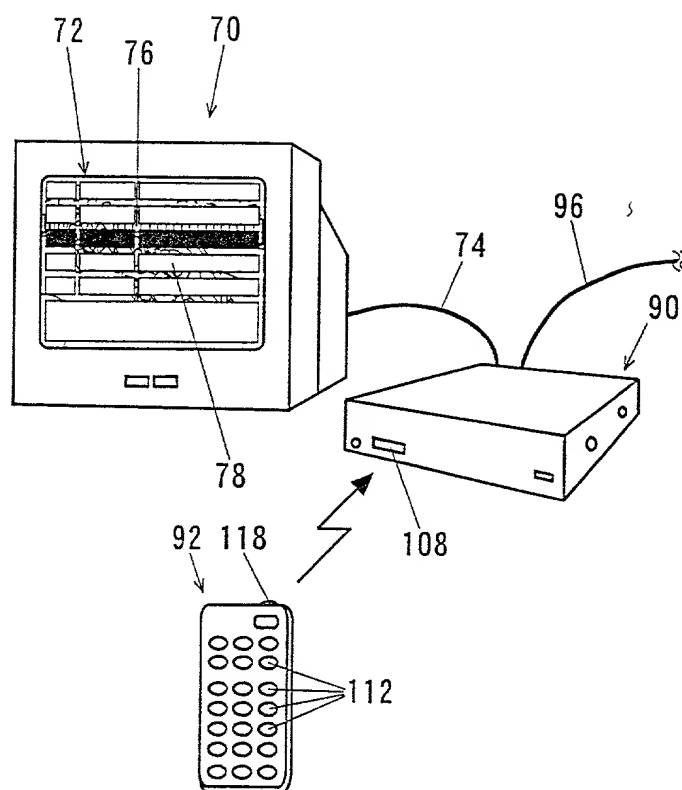


FIG. 7

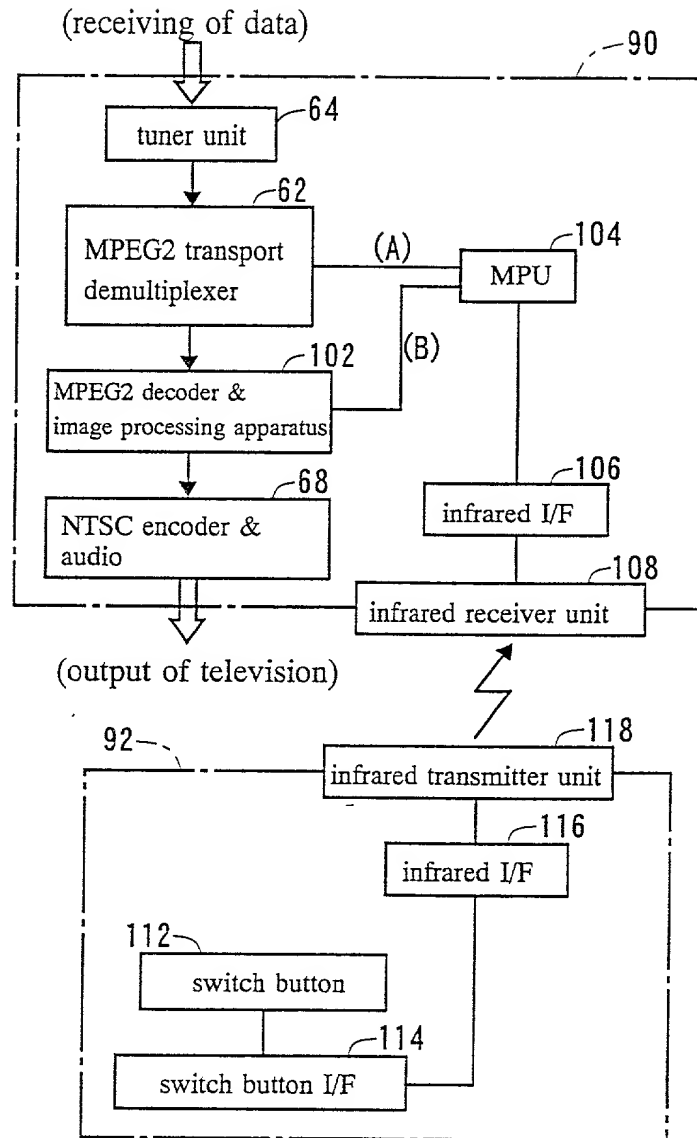


FIG. 8

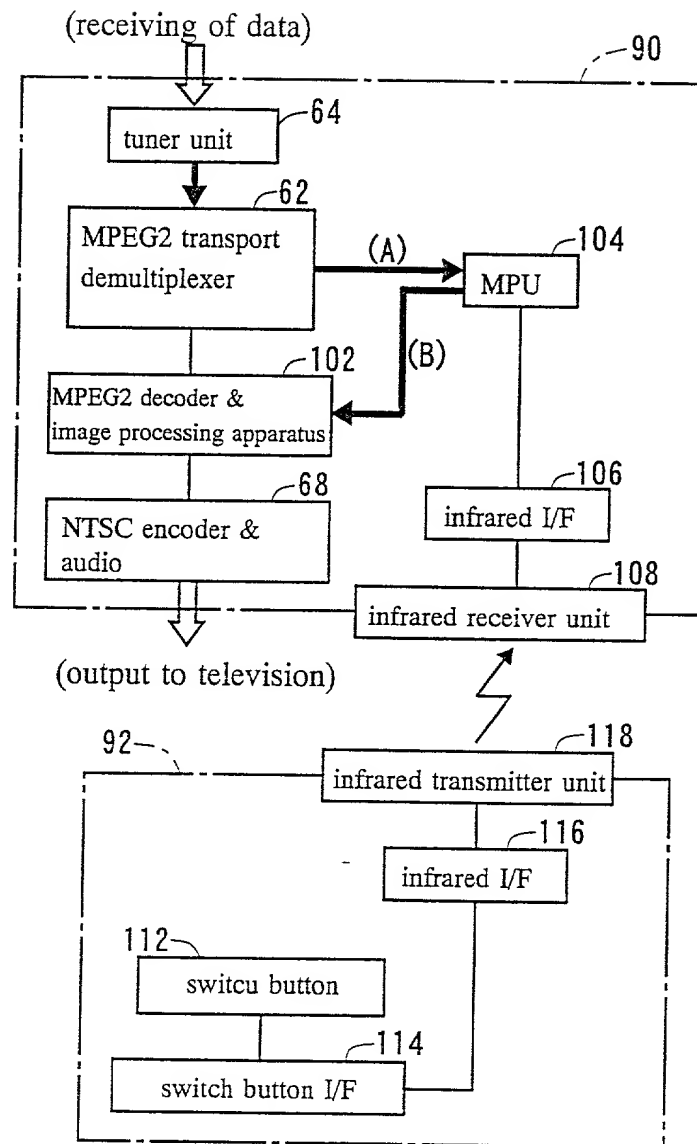


FIG. 9

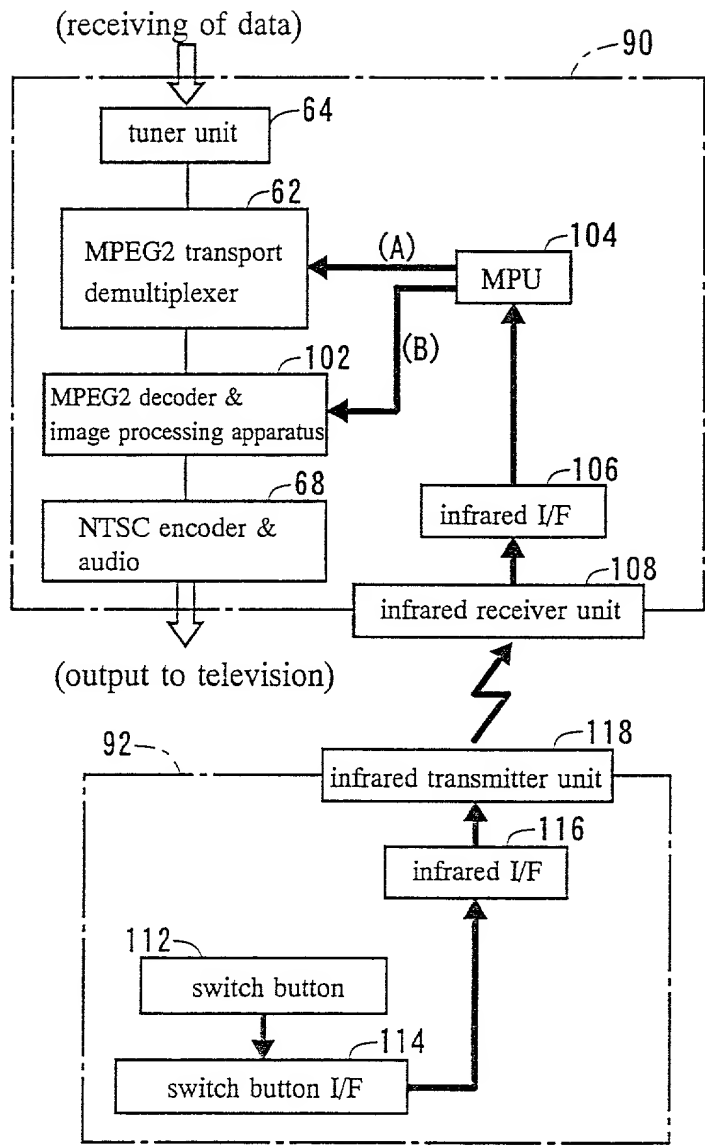


FIG. 10

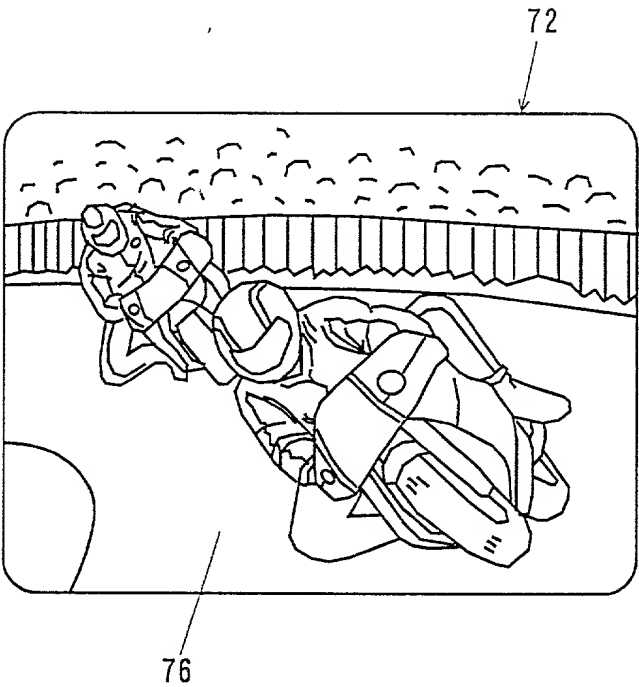


FIG. 11

72			
001	sports	19:00 baseball	82
002	movie	19:00 SF movie	
003	hobby	19:05 gardening	84
016	fishing	19:00 sea fishing	82
020	race	19:02 bike race	
008 19:05 gardening transplantation of alstroemeria and its season			86



FIG. 12


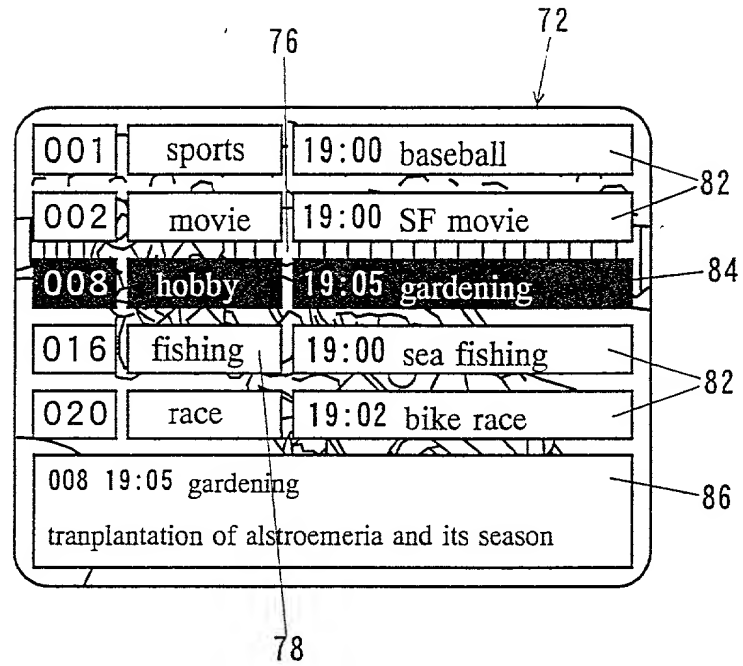


FIG. 13

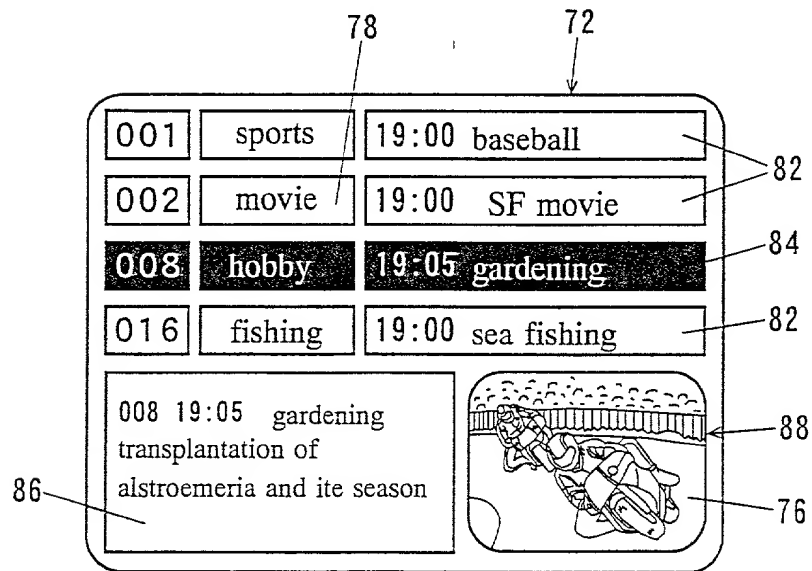

Manny W. Schecter (Reg. 31,722), Terry J. Ilardi (Reg. 29,936), Christopher A. Hughes (Reg. 26,914), Edward A. Pennington (Reg. 32,588), John E. Hoel (Reg. 26,279), Joseph C. Redmond, Jr. (Reg. 18,753), Douglas W. Cameron (Reg. No. 31,596), Wayne L. Ellenbogen (Reg. No. 43,602), Stephen C. Kaufman (Reg. No. 29,551), Daniel P. Morris (Reg. No. 32,053), Louis J. Percello (Reg. No. 33,206), Jay P. Sbrollini (Reg. No. 36,266), David M. Shofit (Reg. No. 39,835), Robert M. Trepp (Reg. No. 25,933) and Louis P. Herzberg (Reg. No. 41,500).

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

Send Correspondence to: Richard L. Catania, Scully, Scott, Murphy & Presser

400 Garden City Plaza, Garden City, New York 11530

Direct Telephone Calls to: (name and telephone number) Richard L. Catania, (516) 742-4343

Yoshifumi Sakamoto

Full name of sole or first inventor

Yoshifumi Sakamoto

Inventor's Signature

January 19, 2000

Date

1492-388, Bodaiji, Kohsei-cho, Kohga-gun, Shiga-ken, 520-3242 Japan

Residence

Japan

Citizenship

Same as residence

Post Office Address

Hiroaki Kubo

Full name of second joint inventor, if any

Hiroaki Kubo

Inventor's signature

January 19, 2000

Date

425-3 Demachi, Ohmihachiman-shi, Shiga-ken, 523-0892 Japan

Residence

Japan

Citizenship

Same as residence

Post Office Address

Norio Fujita

Full name of third joint inventor, if any

Norio Fujita

Inventor's Signature

January 19, 2000

Date

782 Sakohdo, Minakuchi-cho, Kouga-gun, Shiga-ken, 528-0054 Japan

Residence

Japan

Citizenship

Same as residence

Post Office Address

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

**Applicant(s):** Yoshifumi Sakamoto, et al.

**Serial No.:** Unassigned

**Docket:** 13178 (JA998-139)

**Filed:** Herewith

**Dated:**

**For:** PROGRAM DISPLAY AND SELECTING APPARATUS, DIGITAL BROADCAST  
RECEIVER AND DIGITAL BROADCAST RECEIVING SYSTEM

Assistant Commissioner for Patents  
Washington, DC 20231

ASSOCIATE POWER OF ATTORNEY AND  
REQUEST FOR CHANGE OF MAILING ADDRESS

Sir:

Applicant(s), by (his/her/their) attorneys of record,  
hereby grant(s) an Associate Power of Attorney to:

RICHARD L. CATANIA, Reg. No. 32,608; FRANK S. DIGIGLIO, Reg. 31,346;  
KENNETH L. KING, Reg. No. 24,223; STEPHEN D. MURPHY, Reg. No.  
22,002; LEOPOLD PRESSER, Reg. No. 19,827; and JOHN S. SENSNY,  
Reg. No. 28,757


with full power of substitution to prosecute this application and  
transact all business in the United States Patent and Trademark  
Office in connection therewith.

Applicant(s) further request(s) that all future  
correspondence in connection with this application be directed and  
addressed to:

RICHARD L. CATANIA, ESQ.  
SCULLY, SCOTT, MURPHY AND PRESSER  
400 Garden City Plaza  
Garden City, New York 11530

Direct all telephone calls to: (516) 742-4343.

Respectfully submitted,

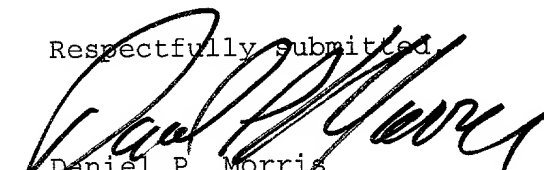  
Daniel P. Morris  
Registration No. 32,053

IBM Corporation  
T.J. Watson Research Center  
P.O. Box 218  
Yorktown Heights, NY 10598

009210" 494460